


SLIMLINE EXPANSION JOINT

Floor to Floor

12 - 25 mm ( 1/2 - 1" ) Expansion Gaps

# IntrAtec 060 : A01

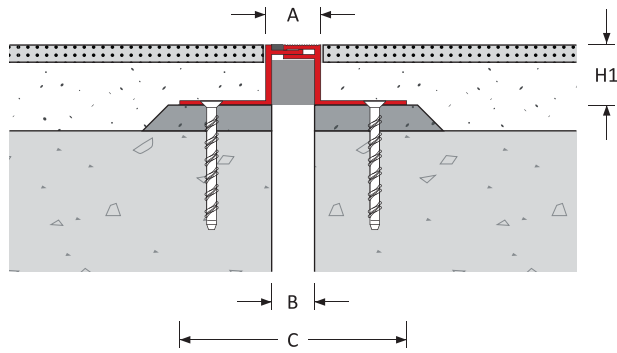

**Expansion Joint Selection Criteria**

**Load Rating**

**Product Details**

Joint Location	Gap Width B(mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline A (mm)	Blockout C (mm)	
								H1 (mm)	H2 (mm)			
Floor - Floor	12	± 2.5	[5.0]	5 kN	31 kN	30 kN	120 kN	25: 35: 50	-	20	120	060-A01-012-(H1)
	25	± 5.0	[10.0]				-			32	132	060-A01-025-(H1)

When specifying or ordering please add the **height (H1)** required to the Product Reference.  
 For example IntrAtec : 060-A01-025-050 denotes an expansion joint 50mm high.

## Features

### Surface

Discrete narrow profile

Hairline serrated surface for improved slip resistance

Easy transit: Americans with Disabilities Act (ADA) compliant across the entire movement cycle

### Movement

Excellent movement capacity for profile width

ASTM E-1399 Class I: Thermal

Class II: Wind

## Traffic Frequency per day

				
≤ 10,000	≤ 100	≤ 100	≤ 100	≤ 10

## System Options

Gap width(s)	12, 25 mm
Height(s)	25, 35, 50 mm
Metal type(s)	Aluminium
Seal colour(s)	NA
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt



**IntrAtec 060 : A01**



## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
 Department Stores | Distribution & Retail Warehouses  
 Factories | Hospitals | Museums | Offices & Hotels  
 Parking | Places of Worship | Residential Buildings  
 Rail, Metros & Elevated Rail Stations | Roads & Bridges  
 Shopping Centres | Sports Stadiums | Supermarkets